


PA-2100 / PA-4100

I N - C A R E N T E R T A I N M E N T

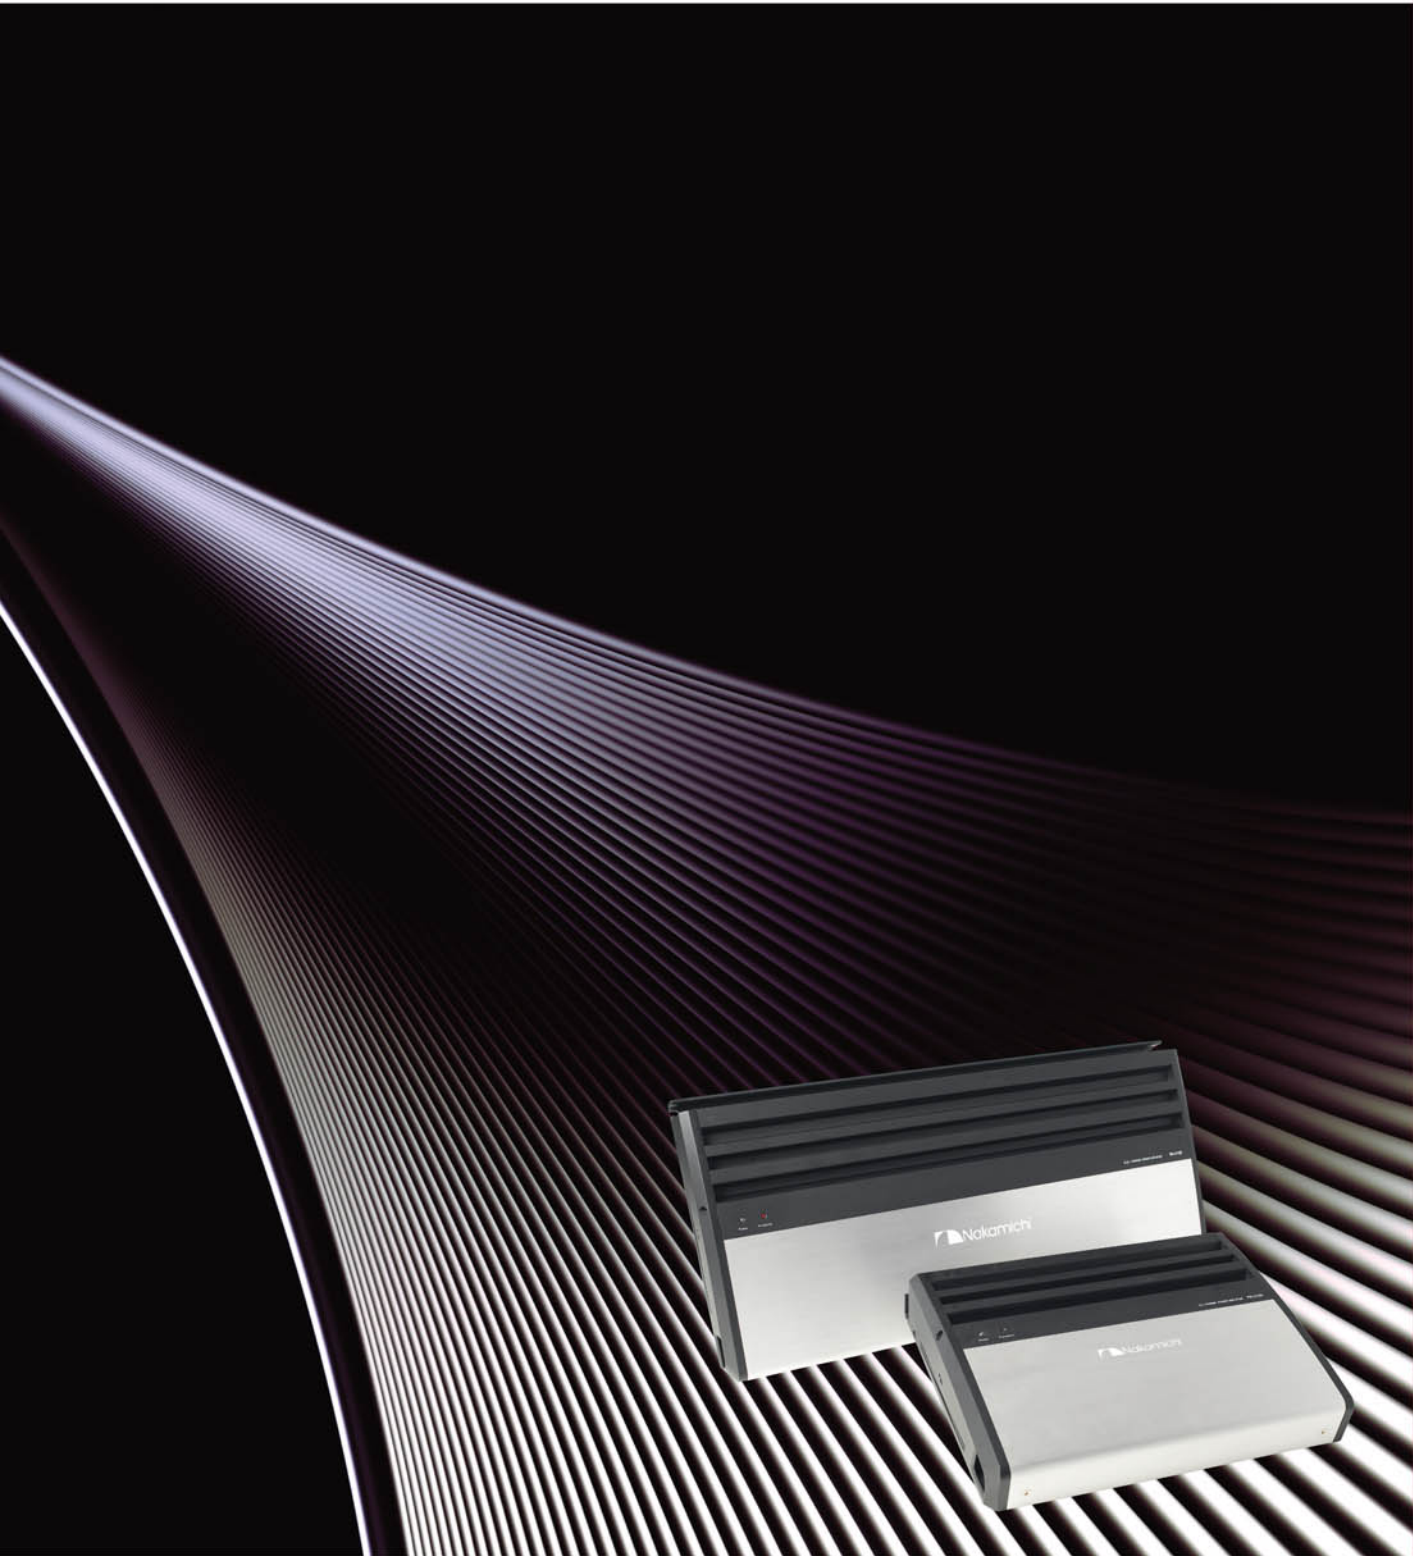

 Nakamichi®

Simply Inspiring.

With six decades of innovation and excellence, you can always expect the best from Nakamichi. Introducing PA-2100 and PA-4100, the formidable power amplifiers that bring exceptional audio reproduction for the audiophile on the road. Precision crafted for maximized sound amplification with minimal distortion, these amplifiers epitomise premium sound quality for an uncompromising performance.

Features

- MOSFET Power Supply - Increase The Amplifier's Ability To Respond To Music Peaks Quickly And Efficiently, With Excellent Sound Quality
- Double Power Output When Using A 2 ohms Speaker
- Stereo & Bridges Mode Application
- Aluminium PCB For All Transistors – Provide Consistent Thermal Stability
- Continuous Phase Control (0 ~ 180 deg)
- Terminal Layout At Bottom Of Amplifier
- Gold-Plated Power And Speaker Connectors
- 4 Way Protection : Output Short, DC Offset, Thermal And Battery > 18 V
- Dual LED Indicators (Power & Protect)

Specifications

Model	PA-2100 2-Channel	PA-4100 4-Channel
Power Amplifier Section		
Power Output RMS @ 4 ohms	100 W x 2	100 W x 4
Power Output RMS @ 2 ohms	200 W x 2	200 W x 4
Bridged Output RMS @ 4 ohms	350 W x 1	350 W x 2
Frequency Response	20 Hz – 20,000 Hz	20 Hz – 20,000 Hz
Crossover (Butterworth)	HP 15 – 400 Hz LP 40 – 400 Hz	HP 15 – 400 Hz LP 40 – 400 Hz
Bass EQ @ 45 Hz	0 – 12 dB	0 – 12 dB
S/N Ratio	>90 dB	>90 dB
Total Harmonic Distortion	<0.05%	<0.05%
Dimensions	6.3 (W) x 32 (H) x 26.8 (D) cm 2.48 (W) x 12.59 (H) x 10.55 (D) inches	6.3 (W) x 53.5 (H) x 26.8 (D) cm 2.48 (W) x 21.06 (H) x 10.55 (D) inches
Weight	4.45 kg / 9.81 lbs	6.61 kg / 14.57 lbs



PA-2100 : 2-Channel Power Amplifier



PA-4100 : 4-Channel Power Amplifier

**Dimensions do not include protruding parts. Specifications and design are subject to change for further improvement without notice.*

Authorized Distributor's Stamp

